

Manta G-917



Description

GigE camera with Sony ICX814



The Manta G-917B/C includes an 1" Sony ICX814 sensor with EXview HAD II technology and 9 Megapixels resolution. This new sensor is distinguished by excellent image quality and a high resolution.

- Sony ICX814 (type1"), 9 Megapixels
- Sync modes
 - Trigger ready, trigger input, exposing, readout, imaging, strobe, GPO
- Trigger
 - External trigger event: rising/falling/any edge, level high/low
 - External trigger delay: 0 to 19 s in 1 μ s increments
- Modular options
 - Various IR cut/pass filters
 - White medical housing
 - PoE (Power over Ethernet)
- Camera temperature monitoring

Specifications

Manta	G-917
Interface	IEEE 802.3 1000baseT
Resolution	3384 x 2710
Sensor	Sony ICX814
Sensor type	CCD Progressive
Sensor size	Type 1
Cell size	3.69 µm
Lens mount	C-Mount
Max frame rate at full resolution	10 fps
A/D	14 bit
On-board FIFO	128 MB
	Output
Bit depth	8/14 (mono) - 8/12 (color) bit
Mono modes	Mono8, Mono12Packed, Mono12
Color modes YUV	YUV411Packed, YUV422Packed, YUV444Packed
Color modes RGB	RGB8Packed, BGR8Packed
Raw modes	BayerRG8, BayerRG12, BayerRG12Packed
	General purpose inputs/outputs (GPIOs)
Opto-coupled I/Os	2 inputs, 2 outputs
RS-232	1
	Operating conditions/Dimensions
Operating temperature	+5 °C ... +45 °C
Power requirements (DC)	8 V - 30 V
Power consumption (12 V)	4.6 W (PoE) / 4 W (non-PoE)
Mass	150 g
Body Dimensions (L x W x H in mm)	86.4 x 44 x 29 mm incl. connectors
Regulations	CE, FCC Class B, RoHS

[Download Manta technical drawing \(click here\)](#)

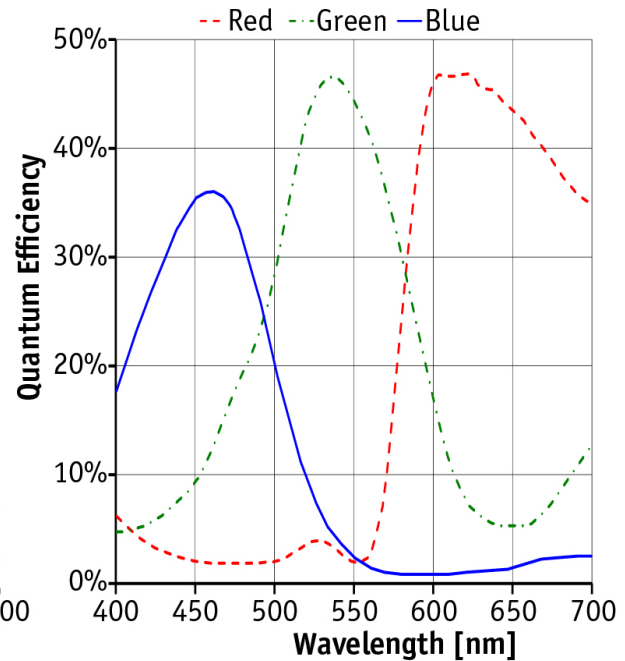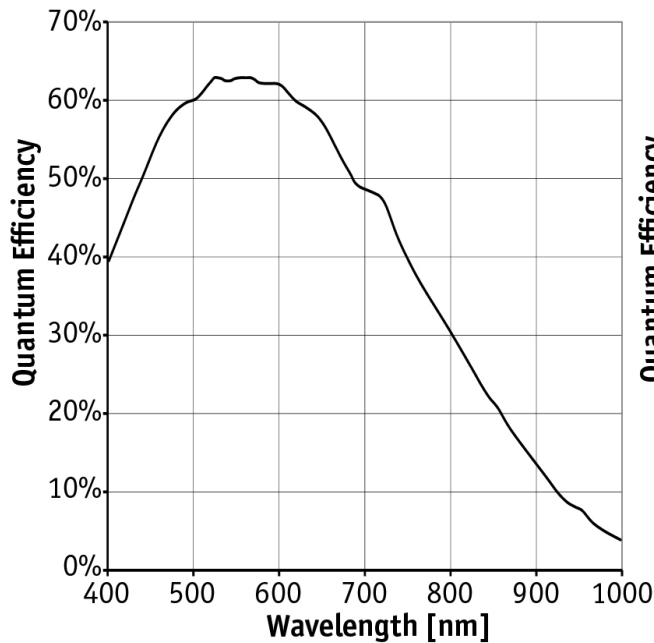

Smart features

- ROI (Region of Interest Readout)
- Gain, exposure
- 3 Look-up tables (LUTs)
- Gamma (0.25 - 4.0)
- DSP subregion (selectable ROI for auto features)
- Binning
- Decimation (sub-sampling)
- Stream hold
- StreamBytesPerSecond (easy bandwidth control)
- IEEE 1588 (PTP, Precision Time Protocol)
- Event channel
- Chunk data
- Storable user sets
- Camera temperature monitoring

Applications

The Manta G-917B/C is a 9 Megapixel GigE camera with excellent image quality and several modular options. It is suitable for a wide range of applications.

Typical applications:

- Machine vision
- High-resolution surveillance
- High-resolution quality control
- Large area scan
- Aerial imaging
- ITS (Intelligent traffic solutions)
- ... and many more