


① IRIS CABLE

(+) RED	INPUT	VOLTAGE
(-) BLACK	GROUND	
WHITE	VIDEO SIGNAL	
GREEN	REMOTE CONTROL	

② MOTOR CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

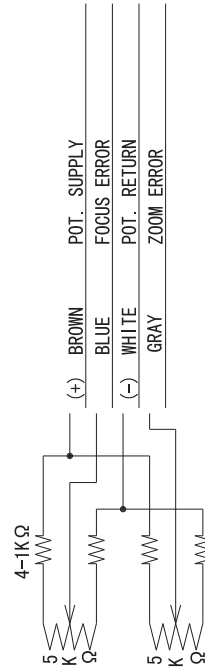


SPECIFICATION

1. USE	FOR 1/2" COLOR, B/W CAMERA
2. FOCAL LENGTH	f=15~375mm
3. IRIS RANGE	F= 2.3 ~ 360
4. IMAGE SIZE	φ 8 (6.4 x 4.8)
5. BACK FOCAL LENGTH	24 mm in air
6. FLANGE FOCAL LENGTH	17.526 mm in air
7. FOCUS RANGE	∞ ~ 2.5 m
8. FIELD ANGLE	DIA. (W) 28.7 ° (T) 1.24 °
	HOL. 23.2 °
	VER. 17.6 °
9. DISTORTION (TV)	0.3 %
10. LENS CONSTRUCTION	12 GROUPS 16 ELEMENTS
11. CLEAR APERTURE	FRONT φ 104 REAR φ 11.7
12. WEIGHT	2.58Kg (DP)

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR COLOR	190 Ω RED (+)	20° (C)
		BLACK	4pin
BRAKE COIL	RESISTOR COLOR	1150 Ω YELLOW (+)	20° (C)
		GREEN	3pin
DRIVE VOLT.	OPEN	LESS THAN +4V	2pin
	CLOSE	OVER THAN 0V	1pin
		W/CLOSING SPRING	



1/2" F2.3/15-375mm

CF962D, DP

CF962A, AP

CF962XA, XAP